

ADDING FEATURES – LICENSE-TO-GO™

Parts required prior to logging on the website:

Note: Each system will require an individual key for each door (or feature) added to the system. Example: if client wants the system to have 3 doors, they will need to have or purchase:

(1.) Panel:

Essential Panel Part # ES-1C or ES-1CB (Bundle)
OR Essential Plus Panel Part # ES-1M or ES-1MB

(2.) Add Door Licenses:

Door Add License Part # ES-1DL or ES-1DLB



ADDING FEATURES – LICENSE-TO-GO

Step 1: Locate MAC Address of your Panel

There are 3 areas where you can locate the MAC Address of your panel.



1. Outside of product package
2. Product label
3. Essential Web Browser Interface



1



2

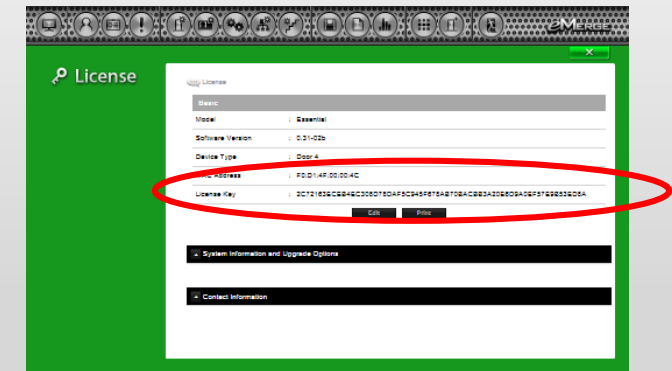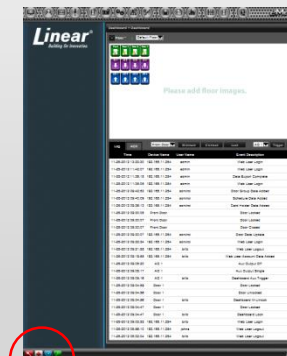


Click key icon in the software.

3


ADDING FEATURES – LICENSE-TO-GO

Step 2: Locate the Serial Number of your License

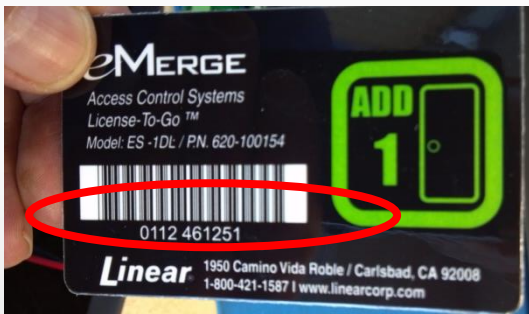

0112461251
(No spacing)

Step 3: Locate the Control Number of your License

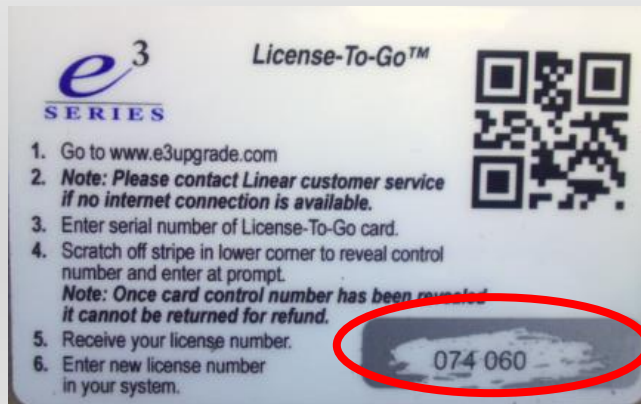

(Scratch to reveal number)

074 060
(XXX (tab) XXX)

ADDING FEATURES – LICENSE-TO-GO™

Step 4: Log on to the Linear eMerge Upgrade Server

Log on: www.e3upgrade.com and select "License Now."

NOTE: If you do not have an internet connection please contact Linear Customer Service or Technical Support at (800) 421-1587.

Linear
Building On Innovation.


License-To-Go™ Services
Easily add features and capabilities to your Access Control System

Existing Member Sign-in	New Member	One Time Use
Extended LTG services will be available in Q4 2013	Registration for extended services will be available in Q4 2013	Need a license fast and don't have time to register? Press button to redeem your License-to-Go card now! License Now

Note: To modify screen size you can hold down you "CTRL" key and scroll your mouse.

ADDING FEATURES – LICENSE-TO-GO™

Step 5: Enter the Panel MAC Address

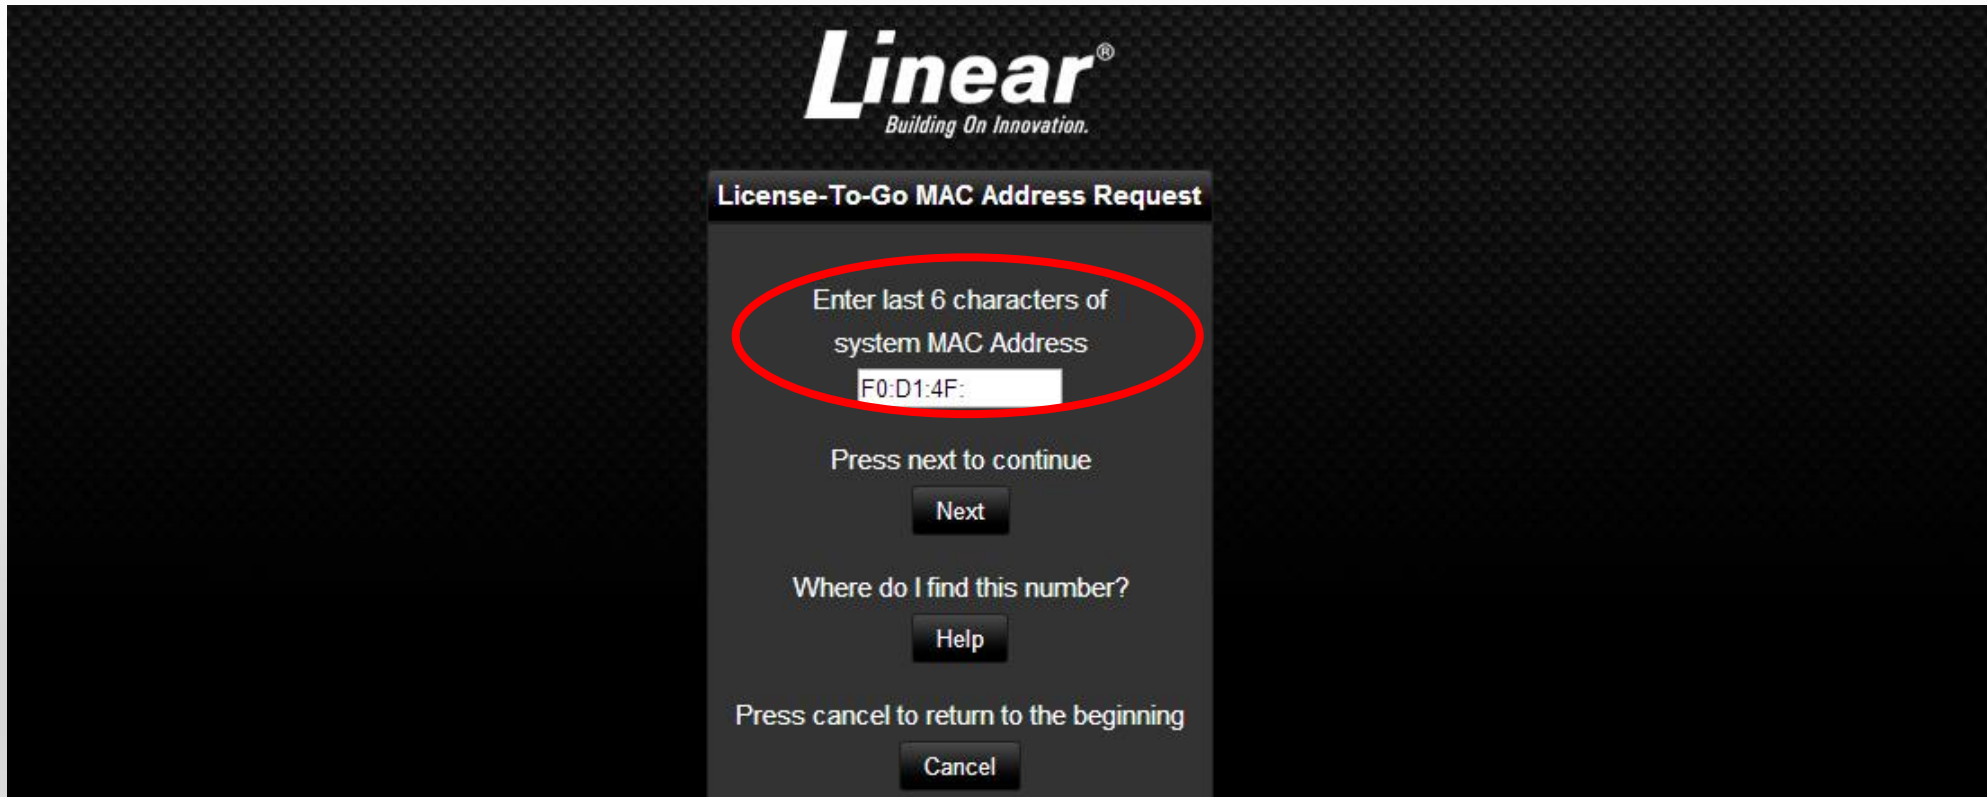

The screenshot shows a dark-themed dialog box titled "License-To-Go MAC Address Request" with the Linear logo at the top. The main instruction is "Enter last 6 characters of system MAC Address", which is circled in red. Below this is a text input field containing "F0:D1:4F:". At the bottom, there are three buttons: "Next", "Help", and "Cancel".

Linear[®]
Building On Innovation.

License-To-Go MAC Address Request

Enter last 6 characters of
system MAC Address

F0:D1:4F:

Press next to continue

Next

Where do I find this number?

Help


Press cancel to return to the beginning

Cancel

ADDING FEATURES – LICENSE-TO-GO

Step 6: License-To-Go Server Display

Display shows current panel configuration including: License Key, MAC Address, Model, and Number of Doors.

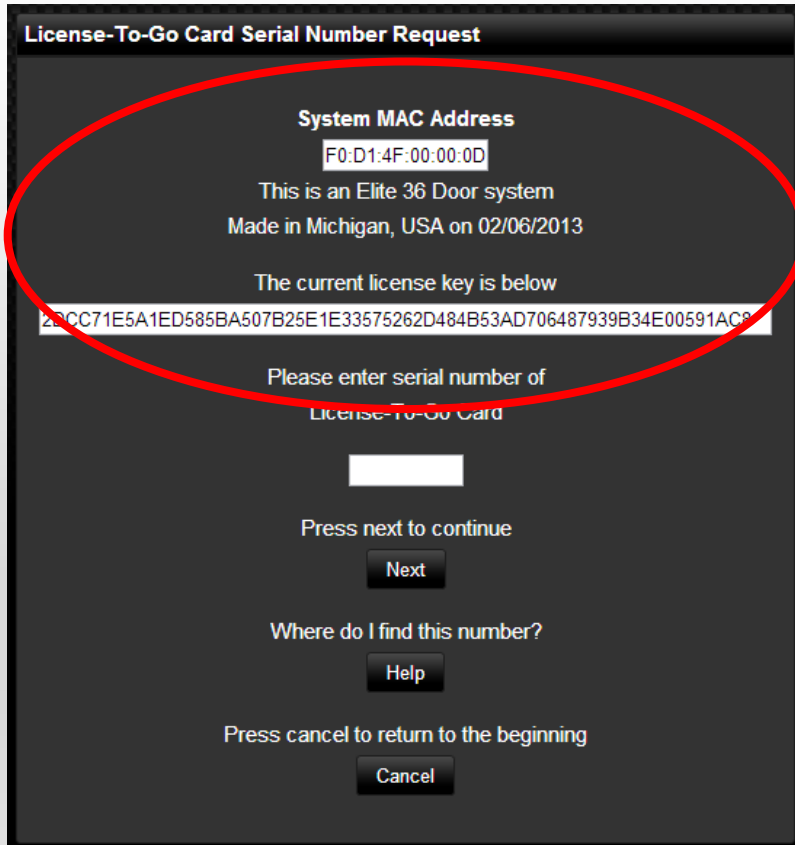

License-To-Go Card Serial Number Request

System MAC Address
F0:D1:4F:00:00:0D

This is an Elite 36 Door system
Made in Michigan, USA on 02/06/2013

The current license key is below
22CC71E5A1ED585BA507B25E1E33575262D484B53AD706487939B34E00591AC9

Please enter serial number of
License-To-Go Card

Press next to continue

Next

Where do I find this number?

Help


Press cancel to return to the beginning

Cancel

ADDING FEATURES – LICENSE-TO-GO

Step 6A: Add the Card Serial Number

Display shows current panel configuration including: License Key, MAC Address, Model, and Number of Doors.

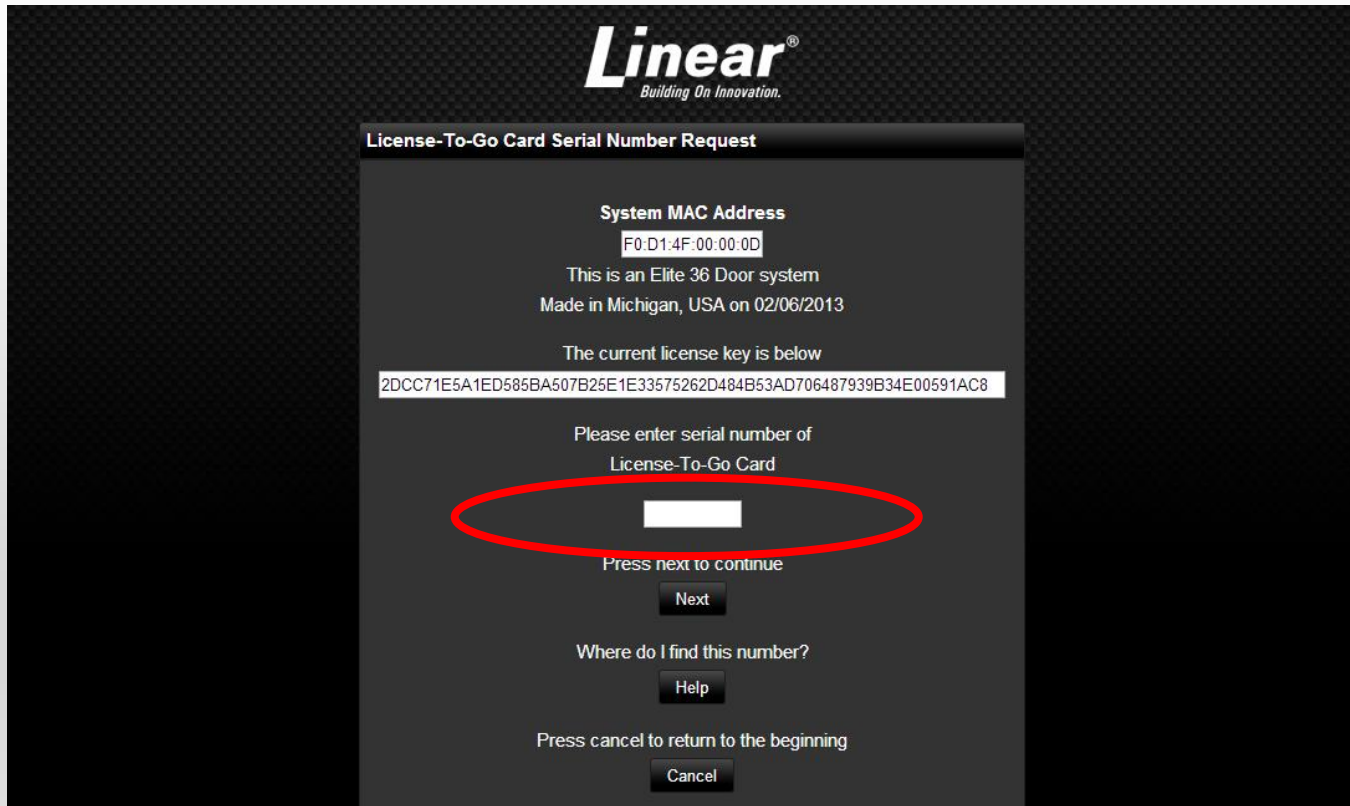

Linear
Building On Innovation.

License-To-Go Card Serial Number Request

System MAC Address
F0:D1:4F:00:00:0D

This is an Elite 36 Door system
Made in Michigan, USA on 02/06/2013

The current license key is below
2DCC71E5A1ED585BA507B25E1E33575262D484B53AD706487939B34E00591AC8

Please enter serial number of
License-To-Go Card

Press next to continue

Next

Where do I find this number?

Help

Press cancel to return to the beginning

Cancel



0112461251
(No spacing)

ADDING FEATURES – LICENSE-TO-GO

Step 6B: Add the Control Number and Click Next

License-To-Go Card Control Number Request

System MAC Address
F0:D1:4F:00:08:28
This is an Essential 1 Door system
Made in Michigan, USA on 05/14/2013

Card Serial Number
0113081468
This card is for adding one door to the system
and can be used to add a door to the system above

If you wish to add a door to this system please scratch
off the protective film on back of card to reveal the control
number and enter below.

WARNING!
Card cannot be returned once protective film is removed.
License key can only be applied to the system above

Enter Card Control Number

Press next to continue


Next

Where do I find this number?

Help

Press cancel to return to the beginning

Cancel

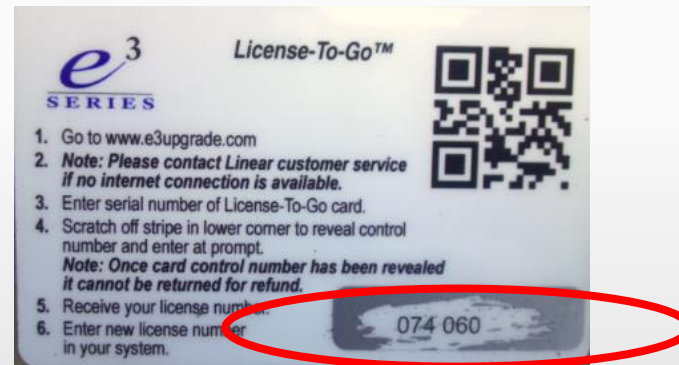

074060


ADDING FEATURES – LICENSE-TO-GO™

TM

P1993x1

Step 6C: Document New License Key

Panel indicates upgrade information and provides new License Key.

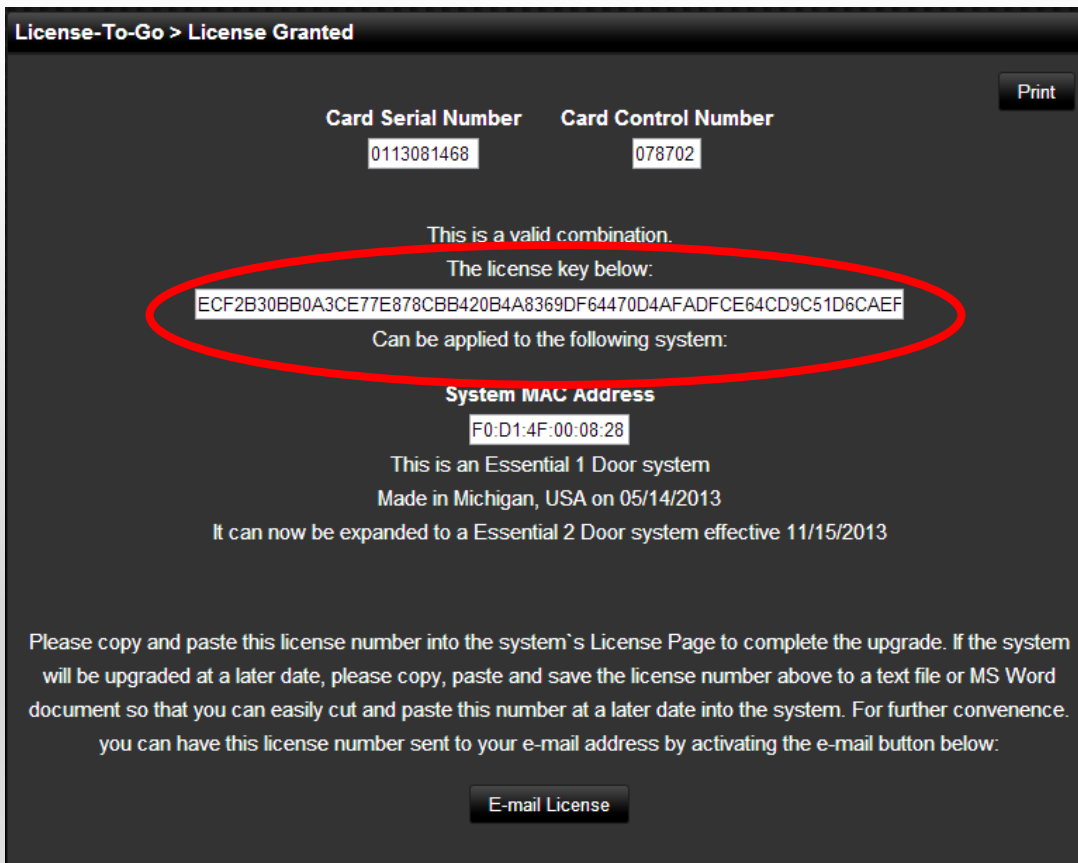

The screenshot shows a web interface for 'License-To-Go > License Granted'. It displays card information, a license key, and system details. A red oval highlights the license key and its application information.

License-To-Go > License Granted Print

Card Serial Number	Card Control Number
0113081468	078702

This is a valid combination.
The license key below:
ECF2B30BB0A3CE77E878CBB420B4A8369DF64470D4AFADFCE64CD9C51D6CAEF
Can be applied to the following system:
System MAC Address
F0:D1:4F:00:08:28

This is an Essential 1 Door system
Made in Michigan, USA on 05/14/2013
It can now be expanded to a Essential 2 Door system effective 11/15/2013

Please copy and paste this license number into the system's License Page to complete the upgrade. If the system will be upgraded at a later date, please copy, paste and save the license number above to a text file or MS Word document so that you can easily cut and paste this number at a later date into the system. For further convenience, you can have this license number sent to your e-mail address by activating the e-mail button below:

E-mail License

ADDING FEATURES – LICENSE-TO-GO™

TM

P1993x1

Step 7: E-mail License

Click on "E-mail License."

License-To-Go > License Granted

Print

Card Serial Number	Card Control Number
0113081468	078702

This is a valid combination.
The license key below:
ECF2B30BB0A3CE77E878CBB420B4A8369DF64470D4AFADFCE64CD9C51D6CAEF

Can be applied to the following system:

System MAC Address
F0:D1:4F:00:08:28

This is an Essential 1 Door system
Made in Michigan, USA on 05/14/2013
It can now be expanded to a Essential 2 Door system effective 11/15/2013

Please copy and paste this license number into the system's License Page to complete the upgrade. If the system will be upgraded at a later date, please copy, paste and save the license number above to a text file or MS Word document so that you can easily cut and paste this number at a later date into the system. For further convenience, you can have this license number sent to your e-mail address by activating the e-mail button below:

E-mail License

ADDING FEATURES – LICENSE-TO-GO

Step 7A: E-mail License

Enter e-mail address and re-enter below.

License-To-Go > License Granted

Print

Card Serial Number Card Control Number

0113081468 078702

This is a valid combination.
The license key below:

ECF2B30BB0A3CE77E878CBB420B4A8369DF64470D4AFADFCE64CD9C51D6CAEF

Can be applied to the following system:

System MAC Address

F0:D1:4F:00:08:28

This is an Essential 1 Door system
Made in Michigan, USA on 05/14/2013
It can now be expanded to a Essential 2 Door system effective 11/15/2013

E-Mail Copy of License Key and system information

Enter e-mail address

Re-enter e-mail address to verify

Activate button to e-mail license key

E-mail License

ADDING FEATURES – LICENSE-TO-GO




Step 8: Applying a New License to eMerge Panel

Option #1

Step 1: After logging on, click on “Wizard” icon and click “Next” until you reach the License page.

Step 2: Select “Edit” and paste the new License Key. Click “Enter”

Step 3: After clicking “Enter,” the system will reboot and bring you back to the log on screen.

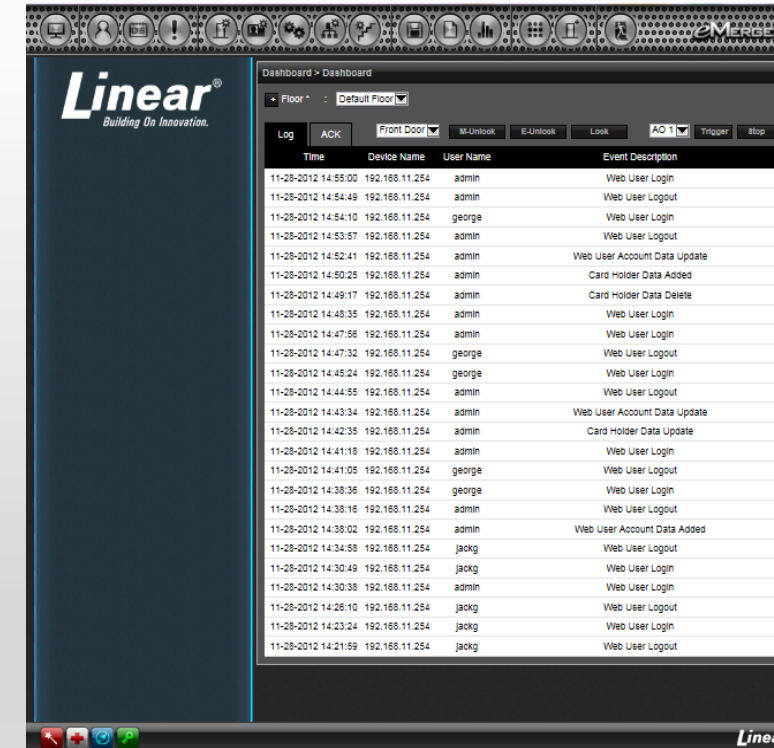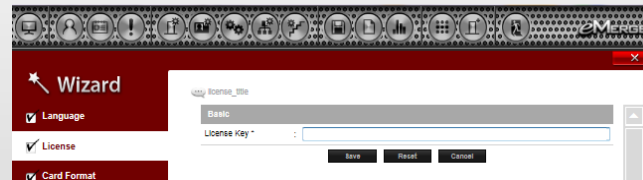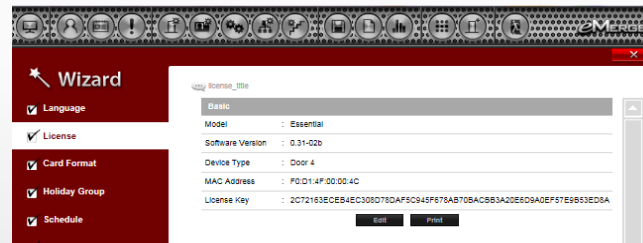

ADDING FEATURES – LICENSE-TO-GO

Step 8A: Applying a New License to eMerge Panel

Option #2

Step 1: After logging on, click on the key icon.

Step 2: Select "Edit" and paste the new License Key. Click "Save"

Step 3: After clicking "Save," the system will reboot and bring you back to the log on screen.

